



Fiber Optic Patch Cord


(Single Mode , Multi Mode ,OM3 , OM4)

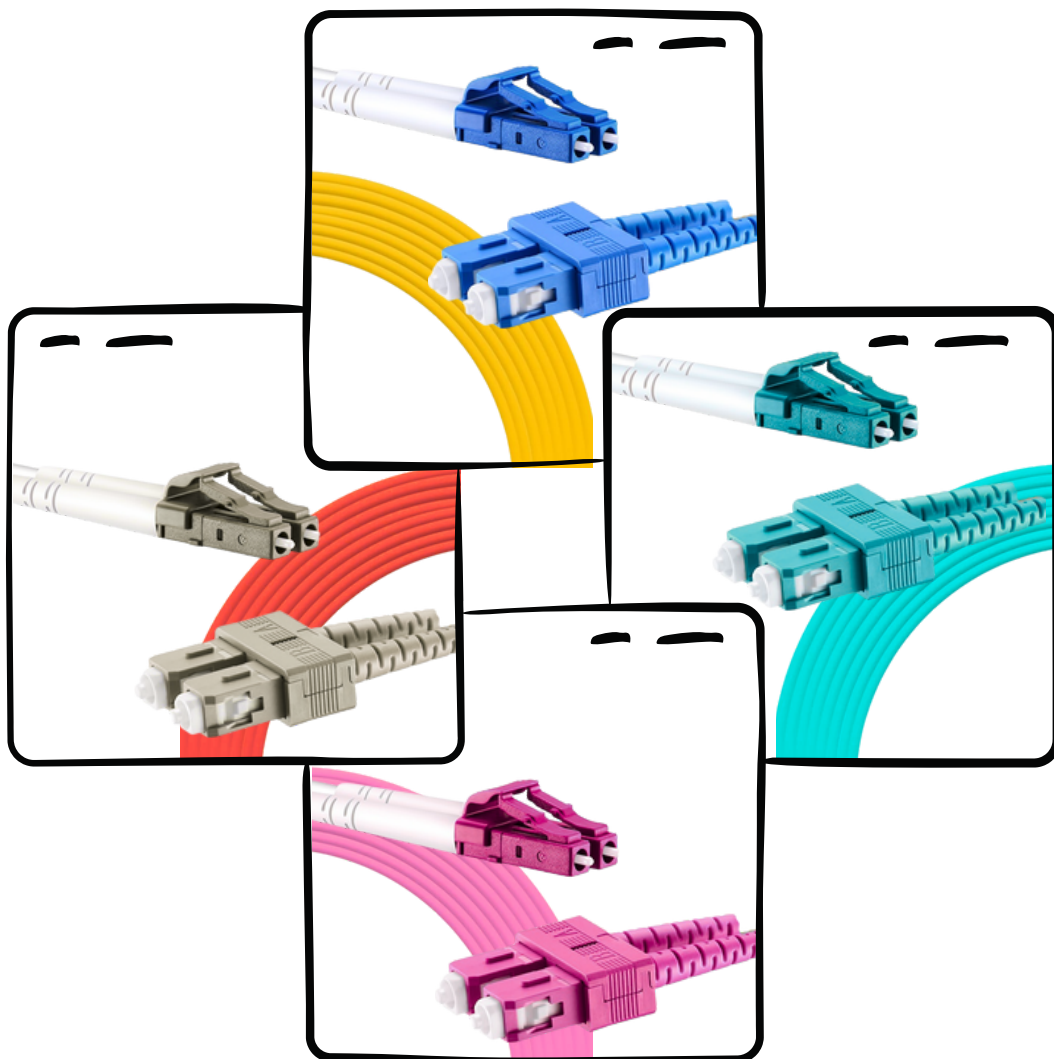


Singlemode OS2,SC/UPC to SC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

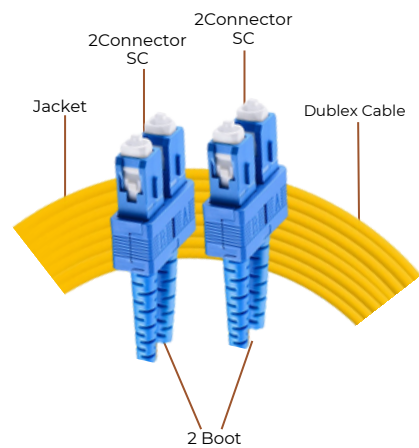

Singlemode OS2,LC/UPC to SC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

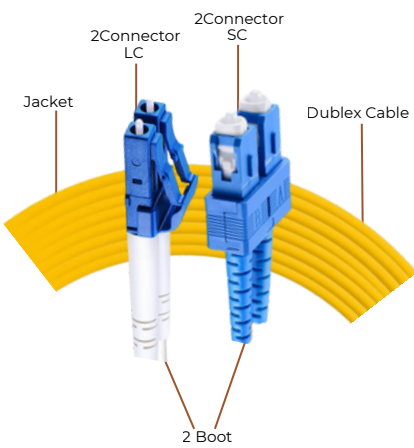

Singlemode OS2,LC/UPC to LC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

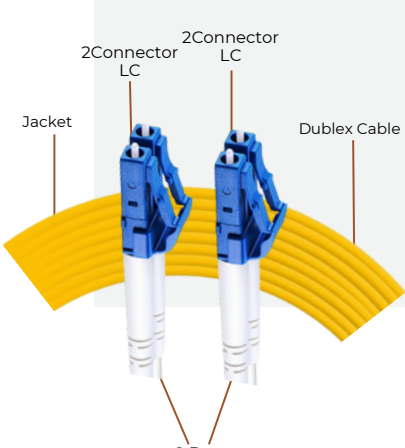

PRODUCT CLASSIFICATION :

Regional Availability	CHINA
Portfolio	BEXLINE
Product Type	Fiber patch cord, duplex
Fiber Mode	SingleMode - OS2

General Specifications :

Jacket Type	LSZH
Body Style	Duplex
Fiber Mode	SingleMode - OS2
Color	Blue
Jacket Color	Yellow
Interface , Connector	(SC/UPC - SC/UPC)-(LC/UPC - SC/UPC)-(LC/UPC - LC/UPC)
Total Ports, quantity	2
Alignment Sleeve Material	Zirconia
Packaging quantity	1 PCS / PAG
Cable Assembly Length Range	(m) 1 – 999
Diameter Over Jacket	2 mm

Mechanical Specifications :

Fiber Type	G.652.D G.657.A, TeraSPEED®
Wavelength	1310, 1550 NM
Insertion loss	≤ 0.3 DB
Return loss	≥ 50 DB
Interchangeability	≤ 0.2 DB
Operating Temperature	-40~75 °C
Storage temperature	-45~85 °C


Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment

ROHS Compliant

UK-ROHS Compliant


P.N:BXFPC-SCSC-D-MM

MultiMode OM2,SC/UPC to SC/UPC,
Fiber Patch Cord, Duplex,
Low Smoke Zero Halogen (LSZH)

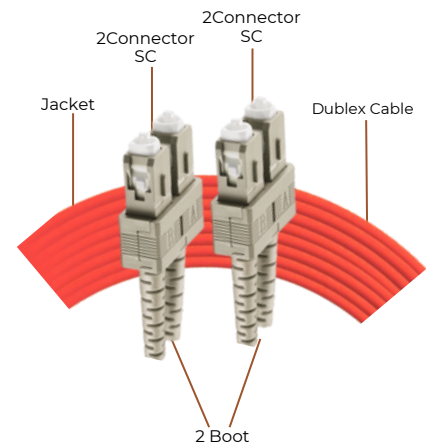


P.N:BXFPC-LCSC-D-MM

MultiMode OM2,LC/UPC to SC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

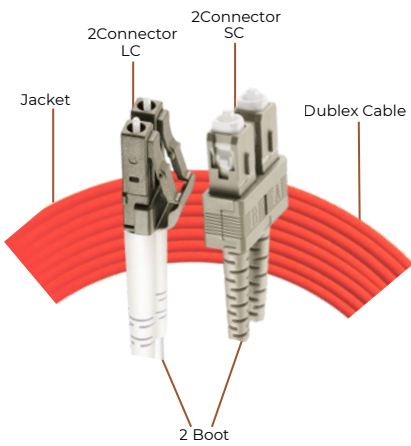

P.N:BXFPC-LCLC-D-MM

MultiMode OM2, LC/UPC to LC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

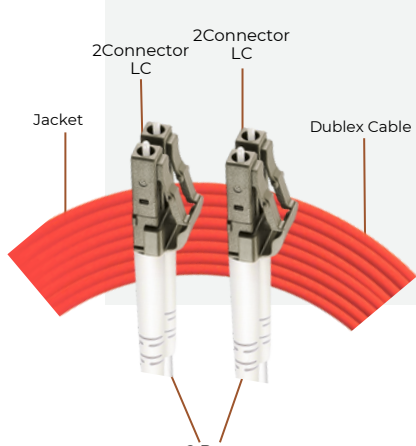

PRODUCT CLASSIFICATION :

Regional Availability	CHINA
Portfolio	BEXLINE
Product Type	Fiber patch cord, duplex
Fiber Mode	MultiMode - OM2

General Specifications :

Jacket Type	LSZH
Body Style	Duplex
Fiber Mode	MultiMode - OM2
Color	Beige
Jacket Color	Orange
Interface , Connector	(SC/UPC - SC/UPC)-(LC/UPC - SC/UPC)-(LC/UPC - LC/UPC)
Total Ports, quantity	2
Alignment Sleeve Material	Zirconia
Packaging quantity	1 PCS / PAG
Cable Assembly Length Range	(m) 1 – 999
Diameter Over Jacket	2 mm

Mechanical Specifications :


Fiber Type	50/125 、 65.2/125 - OM2
Wavelength	1300 , 850 NM
Insertion loss	≤ 0.3 DB
Return loss	≥ 35 DB
Interchangeability	≤ 0.2 DB
Operating Temperature	-40~75 °C
Storage temperature	-45~85 °C

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment


ROHS Compliant

UK-ROHS Compliant


MultiMode OM3,SC/UPC to SC/UPC,
Fiber Patch Cord, Duplex,
Low Smoke Zero Halogen (LSZH)

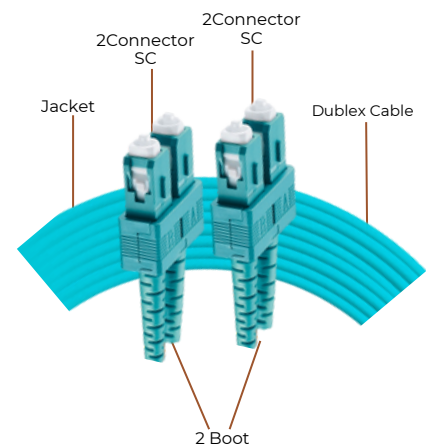

MultiMode OM3,LC/UPC to SC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

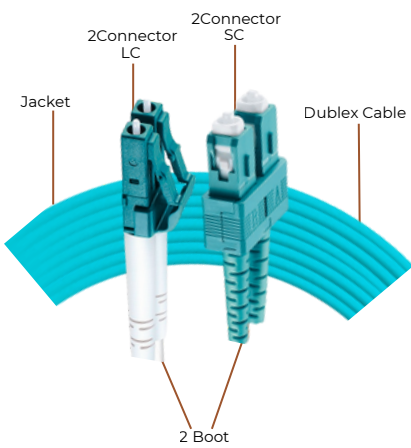

MultiMode OM3, LC/UPC to LC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

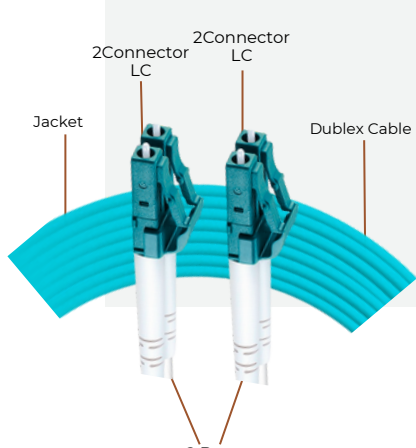

PRODUCT CLASSIFICATION :

Regional Availability	CHINA
Portfolio	BEXLINE
Product Type	Fiber patch cord, duplex
Fiber Mode	MultiMode - OM3

General Specifications :

Jacket Type	LSZH
Body Style	Duplex
Fiber Mode	MultiMode - OM3
Color	Aqua
Jacket Color	Aqua
Interface , Connector	(SC/UPC - SC/UPC)-(LC/UPC - SC/UPC)-(LC/UPC - LC/UPC)
Total Ports, quantity	2
Alignment Sleeve Material	Zirconia
Packaging quantity	1 PCS / PAG
Cable Assembly Length Range	(m) 1 – 999
Diameter Over Jacket	2 mm

Mechanical Specifications :


Fiber Type	50/125 、 65.2/125 - OM3 - LazrSPEED®
Wavelength	1300 , 850 NM
Insertion loss	≤ 0.3 DB
Return loss	≥ 35 DB
Interchangeability	≤ 0.2 DB
Operating Temperature	-40~75 °C
Storage temperature	-45~85 °C

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment


ROHS Compliant

UK-ROHS Compliant


MultiMode OM4,SC/UPC to SC/UPC,
Fiber Patch Cord, Duplex,
Low Smoke Zero Halogen (LSZH)

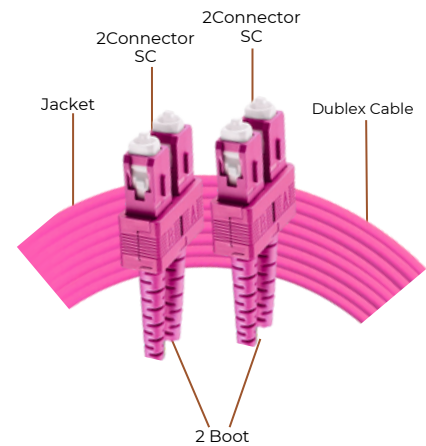

MultiMode OM4,LC/UPC to SC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

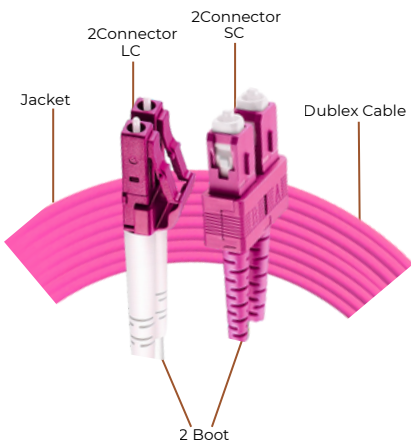

MultiMode OM4, LC/UPC to LC/UPC,
Fiber Patch Cord, Duplex, Low
Smoke Zero Halogen (LSZH)

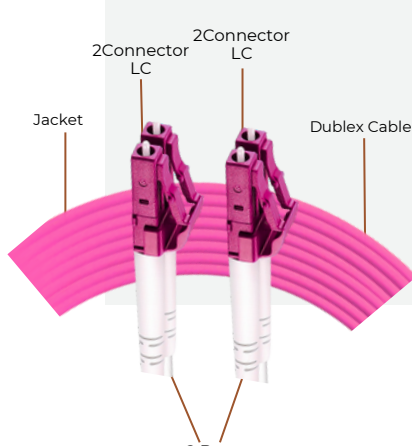

PRODUCT CLASSIFICATION :

Regional Availability	CHINA
Portfolio	BEXLINE
Product Type	Fiber patch cord, duplex
Fiber Mode	MultiMode - OM4

General Specifications :

Jacket Type	LSZH
Body Style	Duplex
Fiber Mode	MultiMode - OM4
Color	Magenta
Jacket Color	Magenta
Interface , Connector	(SC/UPC - SC/UPC)-(LC/UPC - SC/UPC)-(LC/UPC - LC/UPC)
Total Ports, quantity	2
Alignment Sleeve Material	Zirconia
Packaging quantity	1 PCS / PAG
Cable Assembly Length Range	(m) 1 – 999
Diameter Over Jacket	2 mm

Mechanical Specifications :

Fiber Type	50/125 、 65.2/125 - OM4 - LazrSPEED®
Wavelength	1300 , 850 NM
Insertion loss	≤ 0.3 DB
Return loss	≥ 35 DB
Interchangeability	≤ 0.2 DB
Operating Temperature	-40~75 °C
Storage temperature	-45~85 °C

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment

ROHS Compliant UK-ROHS Compliant