

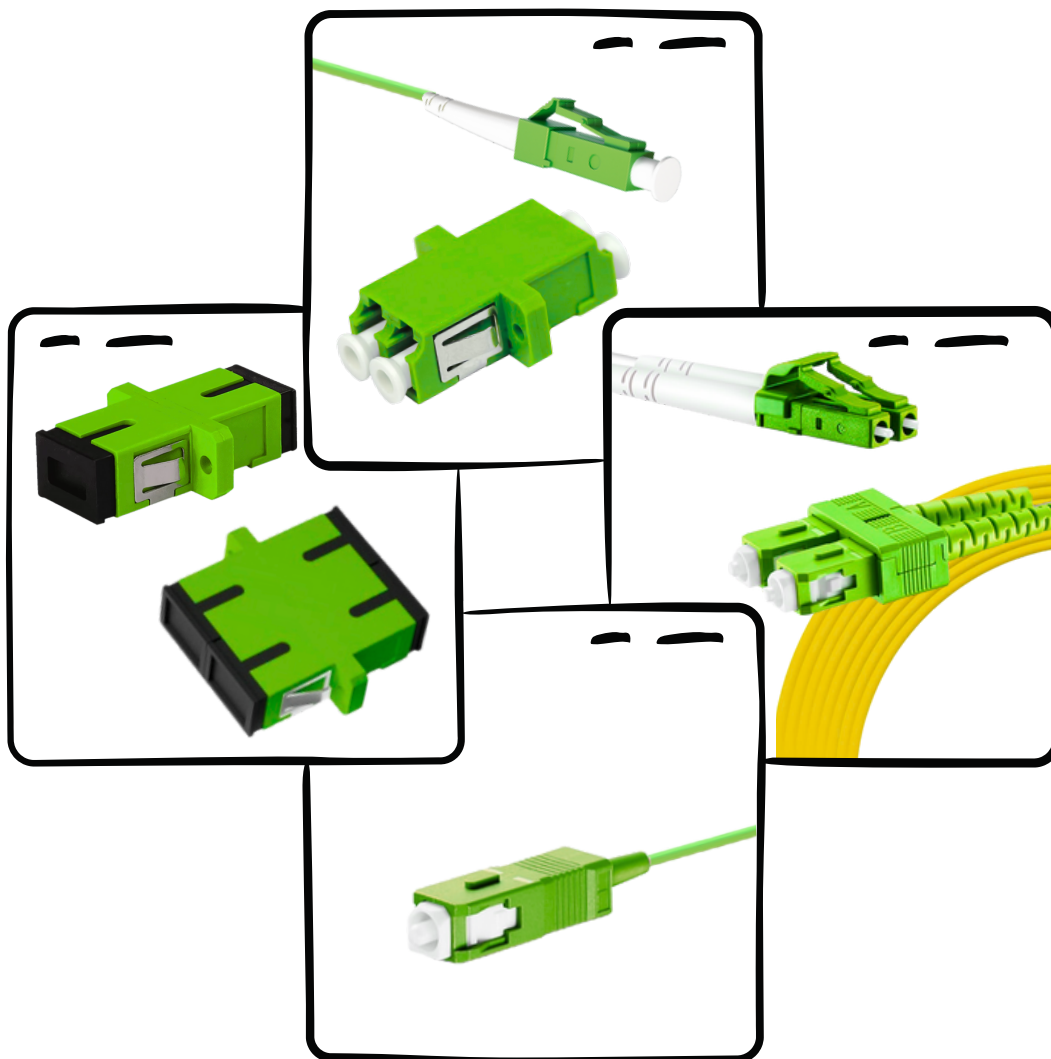


Fiber Optic APC Connector (Coupler - Pigtail - Patch Cord)

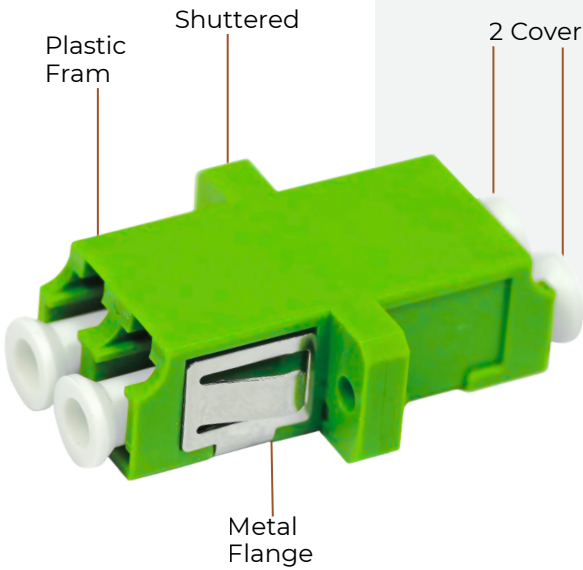

P.N:BXA-LC-APC-D-SM

TeraSPEED® APC LC - ABC Duplex Adapter, Green

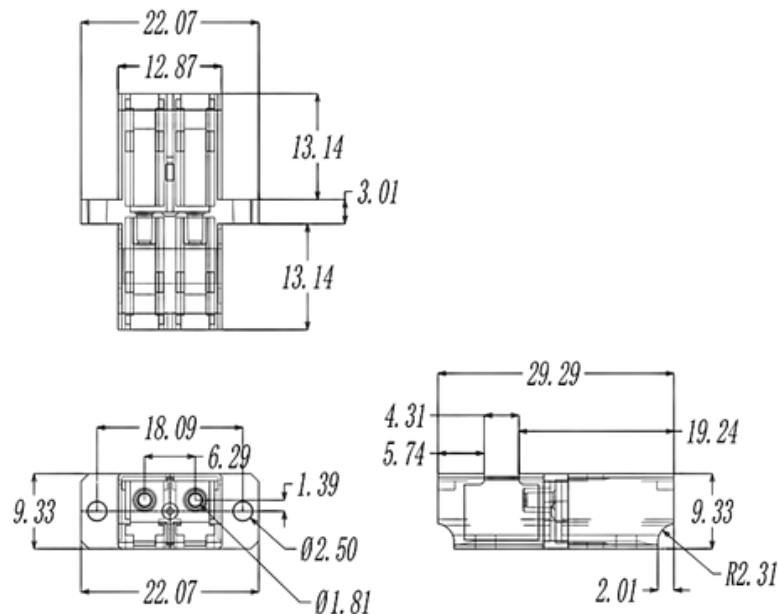

PRODUCT CLASSIFICATION :

● Regional Availability	CHINA
● Portfolio	BEXLINE
● Product Type	Fiber Adapter
● Fiber Mode	SingleMode - APC

General Specifications :

● Body Style	Duplex
● Color	Green
● Interface	LC/APC
● Mounting	Flange
● Shuttered	Yes
● Total Ports, quantity	2
● Transmission Standards	TIA/EIA-568-B.3 TIA/EIA-604 FOCIS-3
● Alignment Sleeve Material	Zirconia
● Packaging quantity	6PCS / PAG - 50PCS/PACK

Mechanical Specifications :

● Fiber Type	APC
● Insertion loss	≤ 0.2 DB
● Interchangeability	≤ 0.1 DB
● Vibration (sine)Frequency Range: 10-55HZ	≤ 0.1 DB
● Operating Temperature	-40~75 °C
● Storage temperature	-45~85 °C


Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV Local Area Network ,Optical Fiber Sensors ,Test Equipment

ROHS Compliant

UK-ROHS Compliant

P.N:BXA-SC-APC-S-SM

TeraSPEED® APC SC - APCSimplex Adapter, Blue

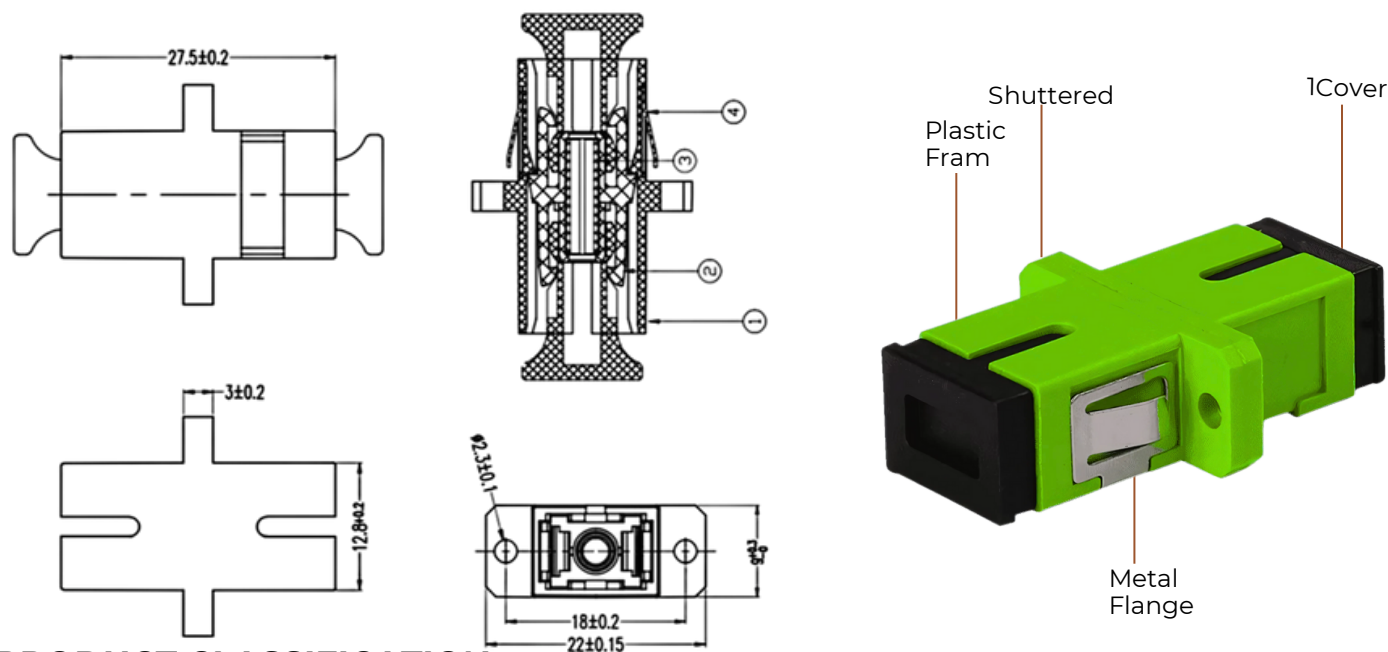

PRODUCT CLASSIFICATION :

● Regional Availability	CHINA
● Portfolio	BEXLINE
● Product Type	Fiber Adapter
● Fiber Mode	SingleMode - APC

General Specifications :

● Body Style	Simplex
● Color	Green
● Interface	SC/APC
● Mounting	Flange
● Shuttered	Yes
● Total Ports, quantity	1
● Transmission Standards	TIA/EIA-568-B.3 TIA/EIA-604 FOCIS-3
● Alignment Sleeve Material	Zirconia
● Packaging quantity	6PCS / PAG - 50PCS/PACK



Mechanical Specifications :

● Fiber Type	APC
● Insertion loss	≤ 0.2 DB
● Interchangeability	≤ 0.1 DB
● Vibration (sine)Frequency Range: 10-55HZ	≤ 0.1 DB
● Operating Temperature	-40~75 °C
● Storage temperature	-45~85 °C

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment
ROHS Compliant UK-ROHS Compliant

P.N:BXA-SC-APC-D-SM

TeraSPEED® APC SC Duplex Adapter, Blue

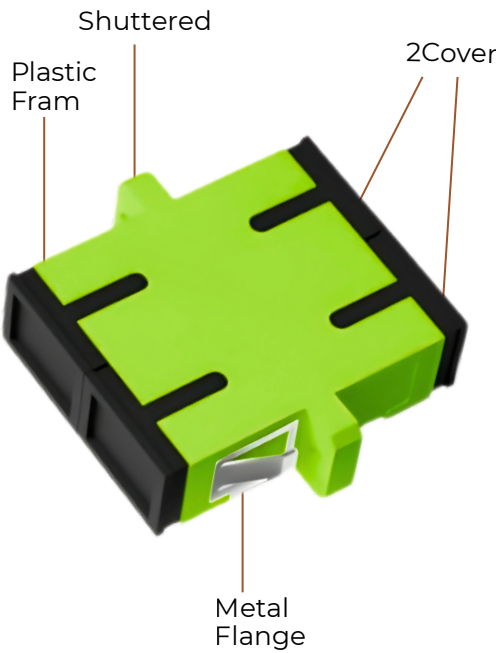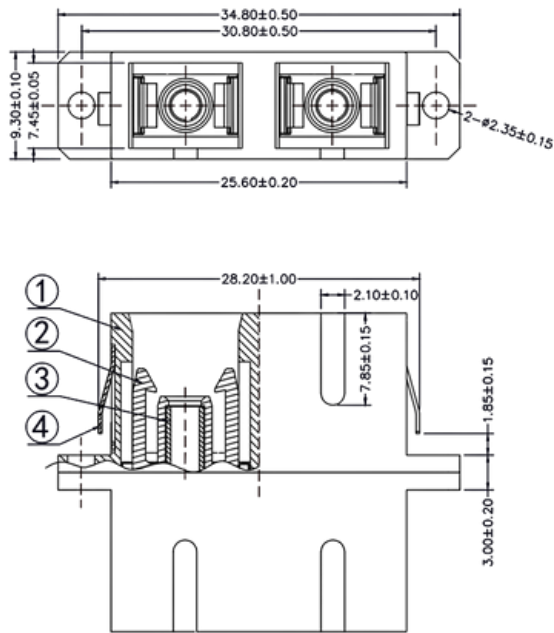

PRODUCT CLASSIFICATION :

● Regional Availability	CHINA
● Portfolio	BEXLINE
● Product Type	Fiber Adapter
● Fiber Mode	SingleMode - APC

General Specifications :

● Body Style	Duplex
● Color	Green
● Interface	SC/APC
● Mounting	Flange
● Shuttered	Yes
● Total Ports, quantity	2
● Transmission Standards	TIA/EIA-568-B.3 TIA/EIA-604 FOCIS-3
● Alignment Sleeve Material	Zirconia
● Packaging quantity	6PCS / PAG - 50PCS/PACK



Mechanical Specifications :

● Fiber Type	APC
● Insertion loss	≤ 0.2 DB
● Interchangeability	≤ 0.1 DB
● Vibration (sine)Frequency Range: 10-55HZ	≤ 0.1 DB
● Operating Temperature	-40~75 °C
● Storage temperature	-45~85 °C

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment
ROHS Compliant UK-ROHS Compliant


P.N: BXP-SC-APC-SM

TeraSPEED® SC/APC to Unconnectorized, Fiber Pigtail

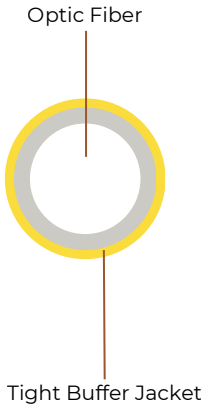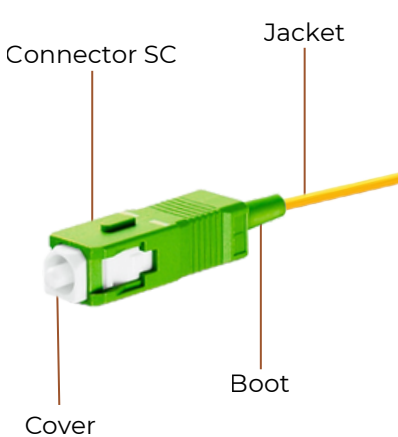

P.N: BXP-LC-APC-SM

TeraSPEED® LC/APC to Unconnectorized, Fiber Pigtail

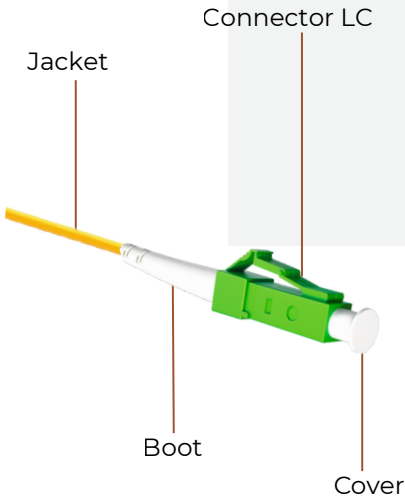

PRODUCT CLASSIFICATION :

- Regional Availability
- Portfolio
- Product Type
- Fiber Mode

CHINA
BEXLINE
Fiber pigtail
SingleMode - APC

General Specifications for SC Connector :

- | | |
|-----------------------------|----------------|
| ● Jacket Type | LSZH |
| ● Interface, Connector | SC/APC |
| ● Alignment Sleeve Material | Zirconia |
| ● Dimensions | 2mtr |
| ● Tensile force | 30N , 50N |
| ● Core/Cladding Diameter | 9/125 μm |
| ● Total Fibers, quantity | 1 |
| ● Color, boot | Green |
| ● Color, connector | Green |
| ● Jacket Color | Yellow-12Color |
| ● Packaging quantity | 1/Pag-12/Pack |

General Specifications for LC Connector :

- | | |
|-----------------------------|----------------|
| ● Jacket Type | LSZH |
| ● Interface, Connector | LC/APC |
| ● Alignment Sleeve Material | Zirconia |
| ● Dimensions | 2mtr |
| ● Tensile force | 30N , 50N |
| ● Core/Cladding Diameter | 9/125 μm |
| ● Total Fibers, quantity | 1 |
| ● Color, boot | White |
| ● Color, connector | Green |
| ● Jacket Color | Yellow-12Color |
| ● Packaging quantity | 1/Pag-12/Pack |

Mechanical Specifications :


- | | |
|-------------------------|---|
| ● Fiber Type | G.652.D G.657.A, TeraSPEED® |
| ● Insertion loss | ≤ 0.3 DB |
| ● Return loss | ≥ 60 DB |
| ● Interchangeability | ≤ 0.2 DB |
| ● Operating Temperature | -40~75 °C |
| ● Storage temperature | -45~85 °C |
| ● Diameter Over Jacket | 0.9mm For 12pcs/pack - 2mm For 1pcs/pag |

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV ,Local Area Network ,Optical Fiber Sensors


ROHS Compliant

UK-ROHS Compliant

Singlemode APC,SC/UPC to SC/APC, Fiber Patch Cord, Duplex, Low Smoke Zero Halogen (LSZH)

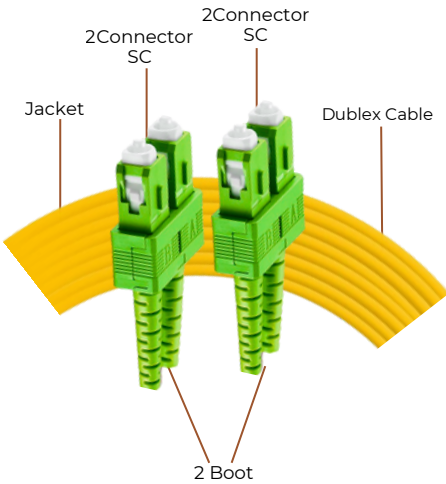

Singlemode APC,LC/APC to LC/APC, Fiber Patch Cord, Duplex, Low Smoke Zero Halogen (LSZH)

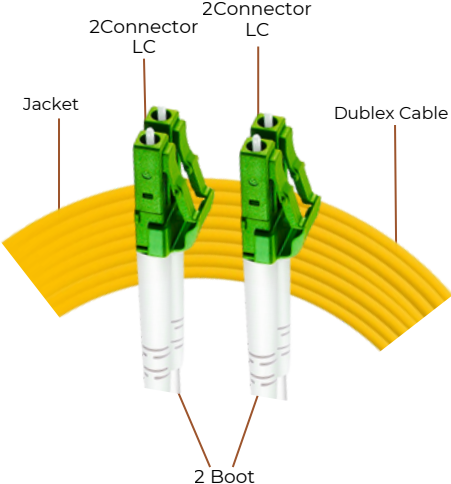

PRODUCT CLASSIFICATION :

● Regional Availability	CHINA
● Portfolio	BEXLINE
● Product Type	Fiber patch cord, duplex
● Fiber Mode	SingleMode - PAC

General Specifications :

● Jacket Type	LSZH
● Body Style	Duplex
● Fiber Mode	SingleMode - APC
● Color	Green
● Jacket Color	Yellow
● Interface , Connector	(SC/APC - SC/APC)-(LC/APC - LC/APC)
● Total Ports, quantity	2
● Alignment Sleeve Material	Zirconia
● Packaging quantity	1 PCS / PAG
● Cable Assembly Length Range	(m) 1 – 999
● Diameter Over Jacket	2 mm

Mechanical Specifications :

● Fiber Type	G.652.D G.657.A, TeraSPEED®
● Wavelength	1310, 1550 NM
● Insertion loss	≤ 0.3 DB
● Return loss	≥ 50 DB
● Interchangeability	≤ 0.2 DB
● Operating Temperature	-40~75 °C
● Storage temperature	-45~85 °C

Low insertion loss ,Good repeatability ,High return loss ,Good interpolation performance ,Good temperature stability ,Strong tensile resistance ,Optical Fiber Communication System ,Optical Fiber Access Network ,Optical Fiber Data Transmission, Optical Fiber CATV
Local Area Network ,Optical Fiber Sensors ,Test Equipment

ROHS Compliant

UK-ROHS Compliant